

ISOMETRIC VIEW

NOT TO SCALE




An Roinn Iompair  
Department of Transport



Údarás Náisiúnta Iompair  
National Transport Authority

TYPICAL CONSTRUCTION DETAILS

Series:  
NTA-1100: KERBS, FOOTWAYS AND PAVED AREAS

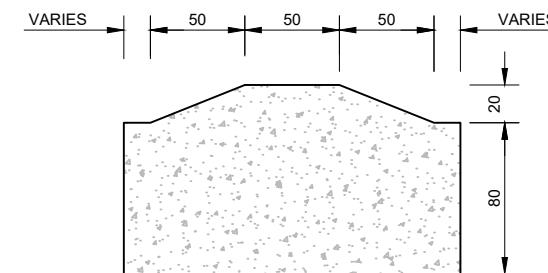

NOTES:

1. DELINEATOR STRIP SHALL COMPLY WITH BS EN 1340.
2. DELINEATOR STRIP TO HAVE SLIP RESISTANCE VALUE NOT LESS THAN 45 AND A POLISHED STONE VALUE NOT LESS THAN 50.
3. ALL CONCRETE TO COMPLY WITH IS EN 206.
4. IF DELINEATOR STRIP IS CONSTRUCTED OVER EXISTING OR PROPOSED DUCTING, A393 MESH IS TO BE PLACED IN BOTTOM OF HAUNCH.
5. IF CAST IN-SITU OR MACHINE LAID, CONCRETE DELINEATOR STRIP TO CC-SPW-01100.
6. DRAINAGE GAPS TO BE PROVIDED IN DELINEATOR STRIP AS REQUIRED, END UNITS MAY BE CONSIDERED FOR DRAINAGE GAPS.
7. ALL DIMENSIONS IN MILLIMETRES U.N.O.

Title

DELINATEATOR STRIP  
CONSTRUCTION

Drawing File Number

NTA-TCD-1100-014

Date	Issue
JAN'26	01