



KERB PROFILE G
KERB FACE SLOPE: 12 DEGREES
CYCLE TRACK / CARRIAGEWAY KERB

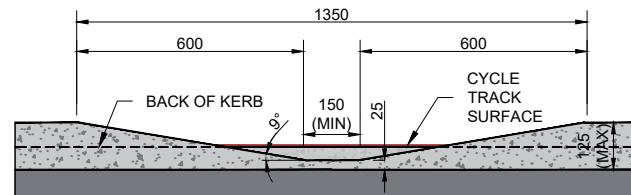

KERB PROFILE G - TYPICAL DRAINAGE GAP IN KERB
DRAINAGE GAP SLOPE SLOPE: 9.5 DEGREES (1:6)

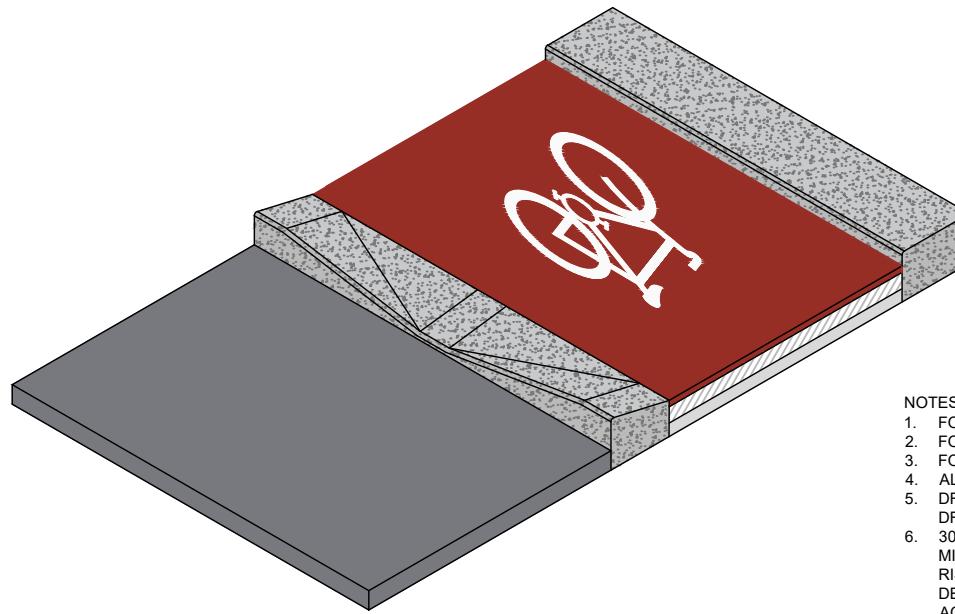

DRAINAGE GAP (ISOMETRIC)

NOT TO SCALE



An Roinn Iompair
Department of Transport

NTA
Údarás Náisiúnta Iompair
National Transport Authority

TYPICAL CONSTRUCTION DETAILS

Series:

NTA-1100: KERBS, FOOTWAYS AND PAVED AREAS

Date	Issue
JAN'26	01

NOTES:

1. FOR CYCLE TRACK PAVEMENT DETAILS REFER TO NTA-TCD-0700-001 TO 004.
2. FOR KERB CONSTRUCTION REFER TO NTA-TCD-1100-011.
3. FOR FOOTWAY DETAILS REFER TO NTA-TCD-1100-015 TO 018.
4. ALL CONCRETE TO COMPLY WITH IS EN 206.
5. DRAINAGE GAP FREQUENCY IS TO BE DETERMINED BASED ON THE PROPOSED DRAINAGE DESIGN.
6. 300mm DESIRABLE MINIMUM WIDTH FOR KERB PROFILE G WITH ABSOLUTE MINIMUM OF 250mm. WHERE A 250mm WIDE KERB IS PROPOSED, A DESIGNER RISK ASSESSMENT SHOULD BE COMPLETED AND A DEPARTURE OR DEROGATION FROM STANDARD SHOULD BE SOUGHT AND APPROVED IN ACCORDANCE WITH DEPARTMENT OF TRANSPORT "NGS CIRCULAR 2 OF 2022"
7. KERBS CAN BE CONSTRUCTED IN PRECAST CONCRETE, EXTRUDED CONCRETE, NATURAL STONE OR CAST IN-SITU CONCRETE.
8. ALL DIMENSIONS IN MILLIMETRES U.N.O.

Title	Drawing File Number
STANDARD CYCLE TRACK KERB PROFILE G DRAINAGE GAP	NTA-TCD-1100-022