
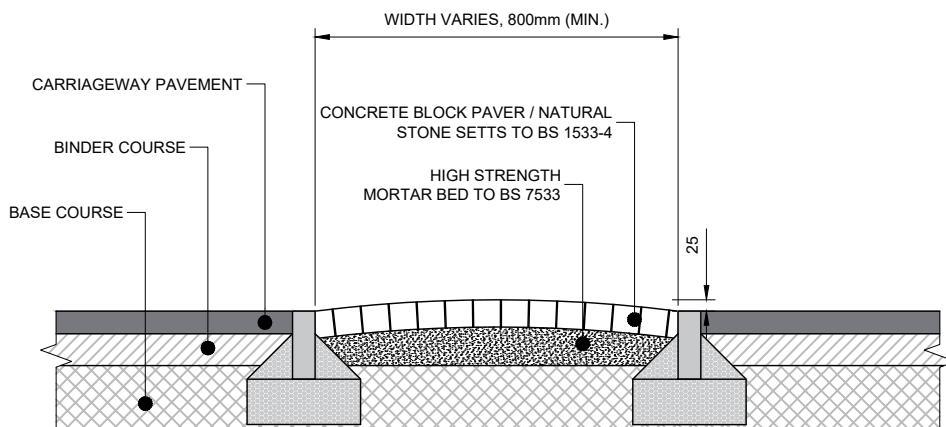


THE USE OF COLOURED PAVEMENT MAY
BE CONSIDERED ON CYCLE STREETS,
PAVEMENT TO DESIGNED TO
ACCOMMODATE VEHICULAR TRAFFIC

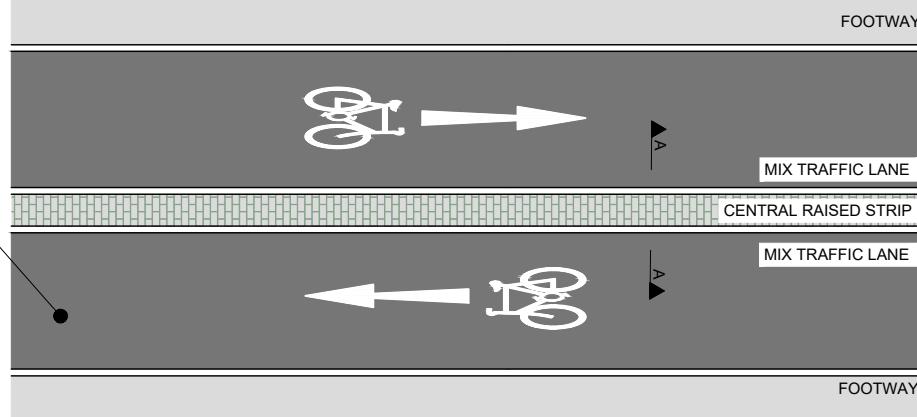

SECTION A-A

NOT TO SCALE

NOTES:

1. FOR EDGE KERB CONSTRUCTION REFER TO NTA-TCD-1100-013.
2. JOINTING MORTAR SHALL BE PREPARED AND LAID TO MANUFACTURERS INSTRUCTIONS.
3. IN THE CASE OF THE INSTALLATION OF NATURAL STONE PAVING, IT'S PSV SHALL MATCH THE EXISTING CARRIAGeway PAVEMENT AND BE PROVIDED WITH A BUSH HAMMER OR FLAME FINISH.
4. FOR FURTHER DETAILS ON MATERIALS AND SPECIFICATION REFER TO DMURS ADVICE NOTE 2.
5. PRECAST BLOCK PAVERS TO BS EN 1339.
6. ALL DIMENSIONS IN MILLIMETERS U.N.O.

TYPICAL CONSTRUCTION DETAILS	Date	Issue	Title	Drawing File Number
	JAN'26	01		
Series:			CENTRAL RAISED STRIP ON MIXED TRAFFIC ROUTES (BLOCK PAVING/STONE SETTS)	
NTA-700: PAVEMENT				NTA-TCD-0700-012



An Roinn Iompair
Department of Transport

NTA
Údarás Náisiúnta Iompair
National Transport Authority