
# PROPOSED TRAFFIC MANAGEMENT SCHEME

for

## Halloween Scream

on behalf of




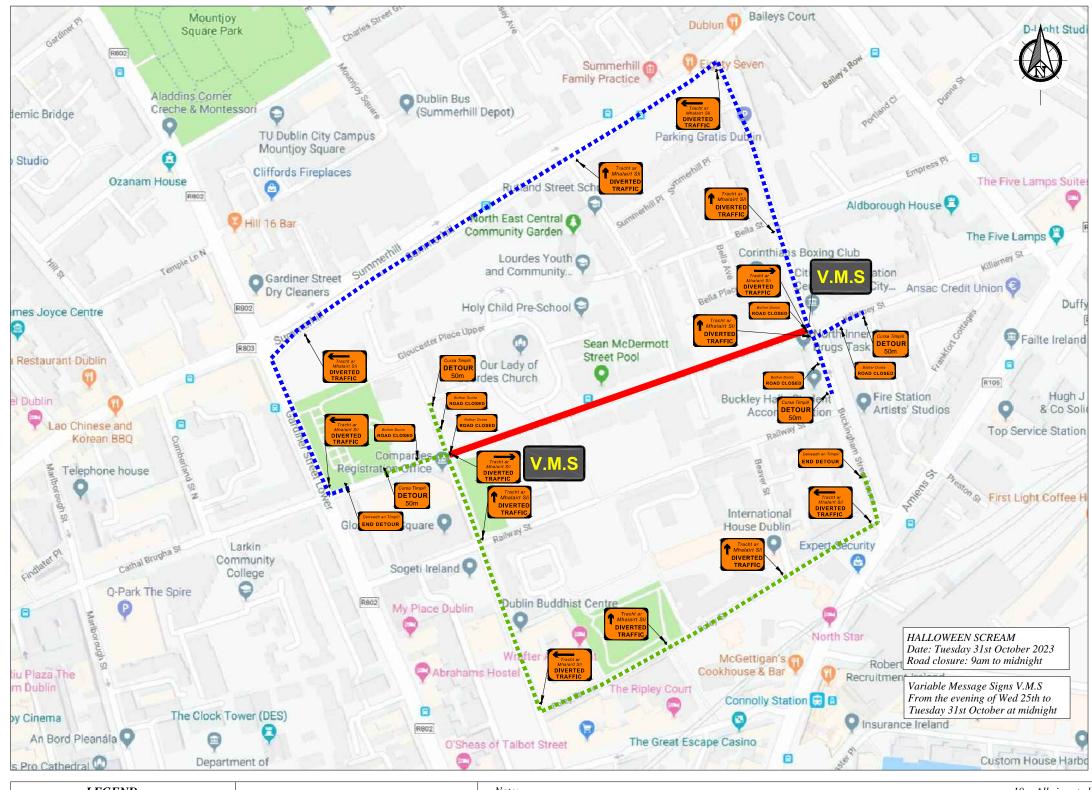





### **LEGEND**



**Diversion Routes** Road Closed

#### Design Parameters:

- Statutory Speed of the Road 30km/h
- Distance between Advance Signs: 10m Number of Advance Signs: 2No
- Minimum Visibility of Signs: 25m
- Longitudinal Safety Zone: 0.5m
- Lateral Safety Zone: 0.5m
- Leading Taper: 1:1
- Maximum at Tapers Cone Space: 1m
- 9. Maximum Longitudinal Cone Space:3m

- All signs to comply with Chapter 8 of the "Traffic Signs Manual"-Guidance Document.
   All Traffic Management to be carried out in accordance with Chapter 8 of the "Traffic Signs Manual".
   Detailed Risk Assessment to be carried out prior to the installation of Traffic Management System.
   The Contractor shall be responsible for providing all required ramp access to all changes in road surface level where traffic runs on a temporary surface and also for cycle/pedestrian ramps where footpath, cycle paths or any surface which has a level discontinuity as a result of the works.
- 5. Exact sign positions to be agreed on site.
- 6. All safety zones to be maintained at all times.
- 7. All affected Parties and an Garda Siochana to be notified prior to works commencing.
- 8. Signs to be positioned so as not to cause an obstruction to other road users.
- 9. Minimum lane width of 3.00m to be maintained at all times.

- 10. All signs to be faced with retro-reflective material to class ref 2 of EN 12899.
- All signs to be Jacea with retro-reflective material to class ref 2 of EN 12099
   All delineation devices should be designed in accordance with IS EN 13422.
   All signage shall be as per table 8.2.2.2 of the "Traffic Signs Manual".
   Safety barrier to be in accordance with IS EN 1317.
   "End of Roadworks" sign placed 20m to 50m from end of works area.

- Entrances to existing dwellings and businesses to be maintained at all times.
- Pedestrian boards to be used around works area if required.

limelight communications	Rev:	Description:	Date:	Job Details: Halloween Scream		Drawing: TM Plan for Road Closure and Diversion		Dwg no: 01 Rev:
				Sheet:	CAD File ref.:	Drawn By:	Date:	Scale:
							19.10.2023	not to scale