

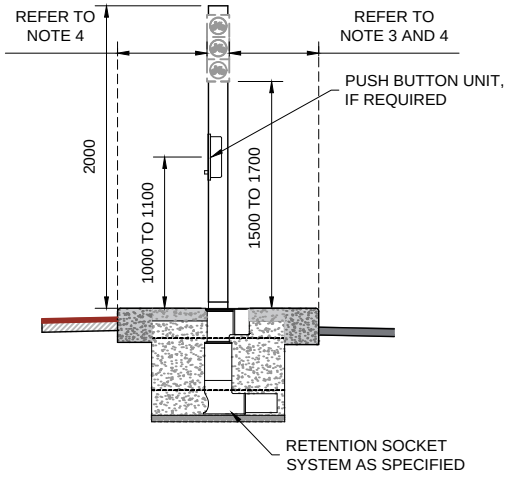


LOW LEVEL
CYCLE SIGNAL POLE

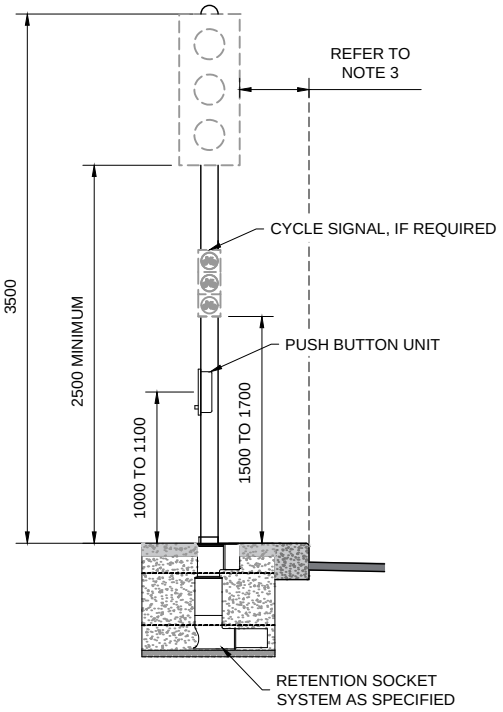

4m TRAFFIC SIGNAL POLE

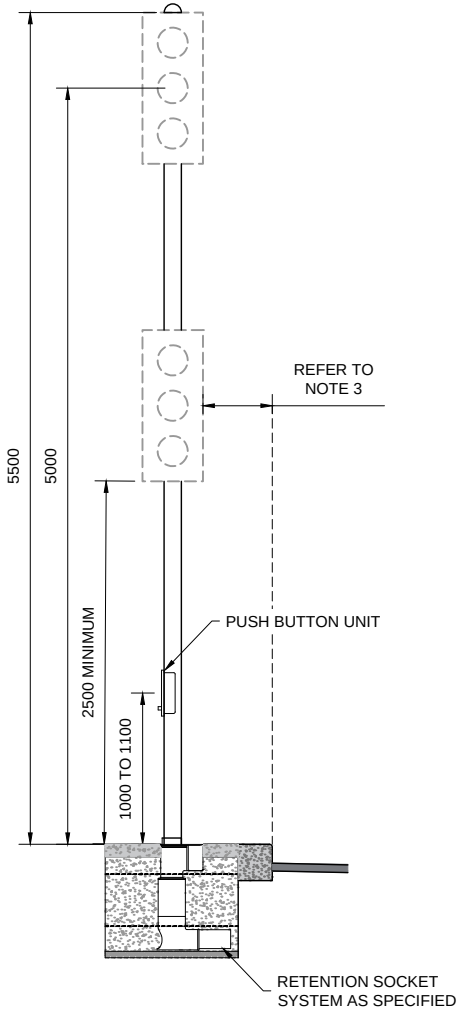

6m TRAFFIC SIGNAL POLE

NOTES:

1. REFER TO THE TRAFFIC SIGNS MANUAL AND THE CONTRACTING AUTHORITY'S REQUIREMENTS FOR ANY TRAFFIC SIGNAL INSTALLATIONS.
2. THE TYPE OF TRAFFIC SIGNAL POLE, SIGNAL HEADS, PUSH BUTTON UNITS AND OTHER ANCILLARIES ARE TO BE AGREED WITH THE CONTRACTING AUTHORITY.
3. THE DISTANCE BETWEEN THE KERB EDGE AND ANY PART OF A SIGNAL ASSEMBLY SHOULD NOT NORMALLY BE LESS THAN 450mm WITH AN ABSOLUTE MINIMUM OF 350mm IN ACCORDANCE WITH THE TSM.
4. WHERE LOW LEVEL CYCLE SIGNALS ARE SEPARATELY MOUNTED ON A LOW LEVEL POLE WITHIN A TRAFFIC ISLAND, THE MINIMUM HORIZONTAL CLEARANCE MAY BE REDUCED TO 250mm IN ACCORDANCE WITH THE TRAFFIC SIGNS MANUAL.
5. DESIGNERS TO CONSIDER SIGNAL ASPECT SIZE IN RELATION TO SIGNAL POLE DIAMETER AND ENCROACHMENT INTO FOOTWAY.
6. THE INSTALLATION OF RETENTION SOCKETS AND FOUNDATIONS MUST BE IN ACCORDANCE WITH THE RETENTION SOCKET PROVIDER'S REQUIREMENTS.
7. TRAFFIC SIGNAL POLES TO COMPLY WITH EN 12767 AND EN 12899.
8. ALL DIMENSIONS IN MILLIMETRES U.N.O.

NOT TO SCALE

An Roinn Iompair
Department of Transport

NTA
Údarás Náisiúnta Iompair
National Transport Authority

TYPICAL CONSTRUCTION DETAILS

Series:
NTA-1200: TRAFFIC SIGNALS AND SIGNS

Date	Issue
OCT'26	01

Title
TRAFFIC SIGNAL POLES
- KEY DIMENSIONS

Drawing File Number
NTA-TCD-1200-001