
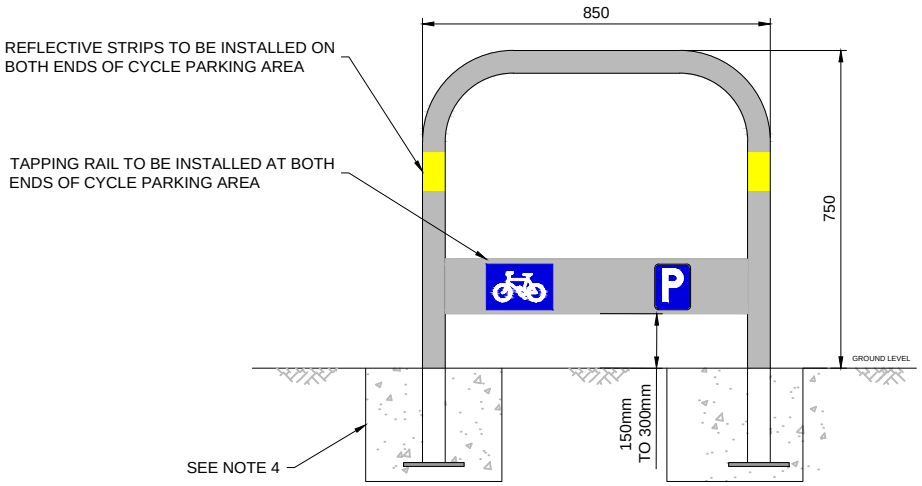



TYPICAL CYCLE STAND (END PIECE)

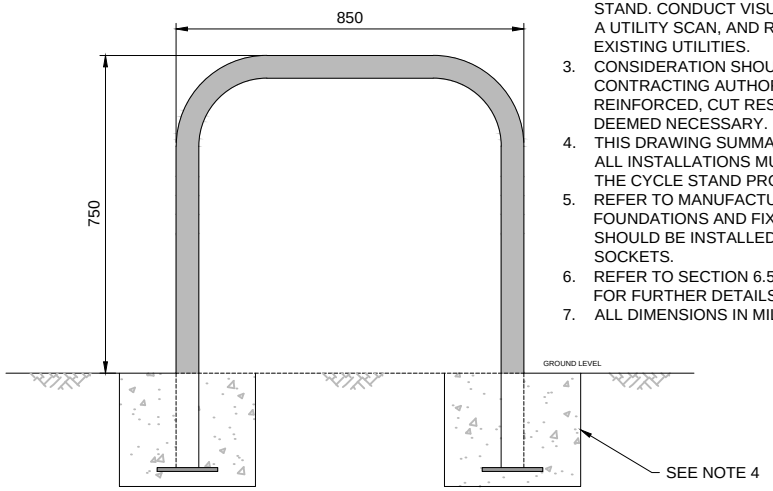


TYPICAL CYCLE STAND

NOTES:

1. STANDS TO BE POLISHED STAINLESS STEEL CIRCULAR HOLLOW SECTIONS.
2. DETERMINE A SUITABLE LOCATION FOR THE CYCLE STAND. CONDUCT VISUAL INSPECTIONS, PERFORM A UTILITY SCAN, AND REVIEW DRAWINGS FOR EXISTING UTILITIES.
3. CONSIDERATION SHOULD BE GIVEN BY THE CONTRACTING AUTHORITY FOR THE USE OF REINFORCED, CUT RESISTANT CYCLE STANDS IF DEEMED NECESSARY.
4. THIS DRAWING SUMMARISES KEY REQUIREMENTS. ALL INSTALLATIONS MUST BE IN ACCORDANCE WITH THE CYCLE STAND PROVIDER'S GUIDELINES.
5. REFER TO MANUFACTURERS REQUIREMENTS FOR FOUNDATIONS AND FIXINGS. CYCLE STANDS SHOULD BE INSTALLED WITHIN RETENTION SOCKETS.
6. REFER TO SECTION 6.5.1 OF CYCLE DESIGN MANUAL FOR FURTHER DETAILS
7. ALL DIMENSIONS IN MILLIMETRES U.N.O.

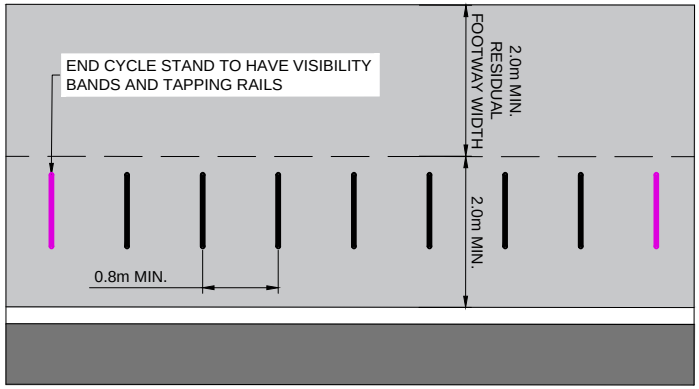

TYPICAL CYCLE STAND LAYOUT

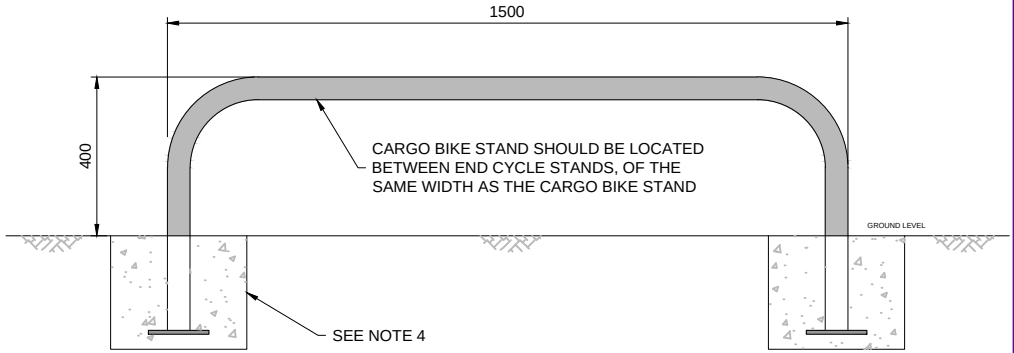

TYPICAL CARGO BIKE STAND

NOT TO SCALE

An Roinn Iompair
Department of Transport

NTA
Údarás Náisiúnta Iompair
National Transport Authority

TYPICAL CONSTRUCTION DETAILS

Series:
NTA-5100: GENERAL DETAILS

Date	Issue
OCT'26	01

Title
TYPICAL DIMENSION FOR CYCLE STAND

Drawing File Number
NTA-TCD-5100-001